





Merit Part: 32751
Universal Ignition Starter Switch – Diesel Version

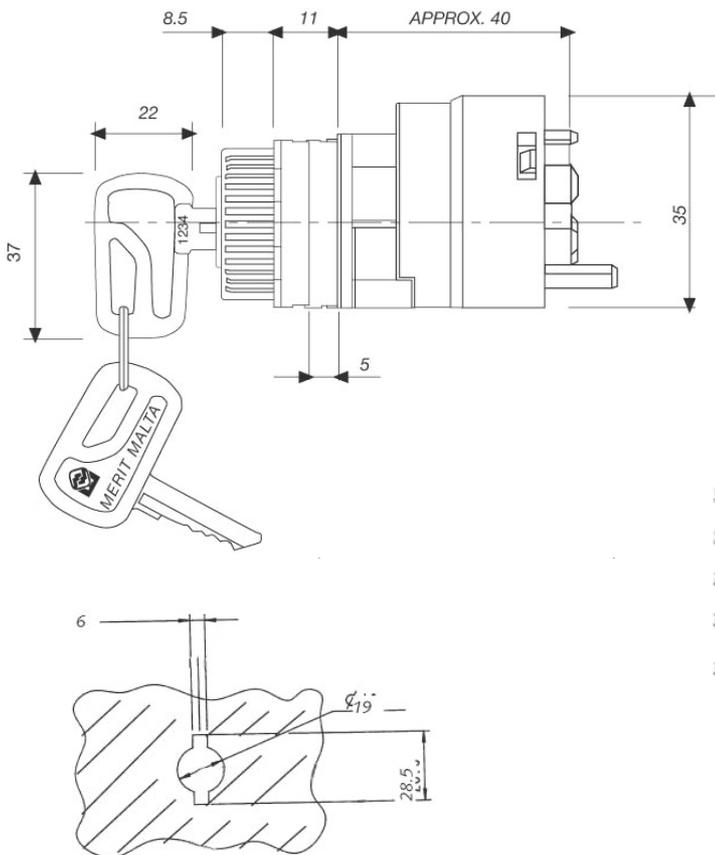

Contacts	Maximum load at 24V	Maximum Current
30-P	4A	Continuous operation
30-15/54	18A	Continuous operation
30-19	30A	60s
30-17	30A	60s
30-50a	40A	Short time

FUNCTION DIAGRAM

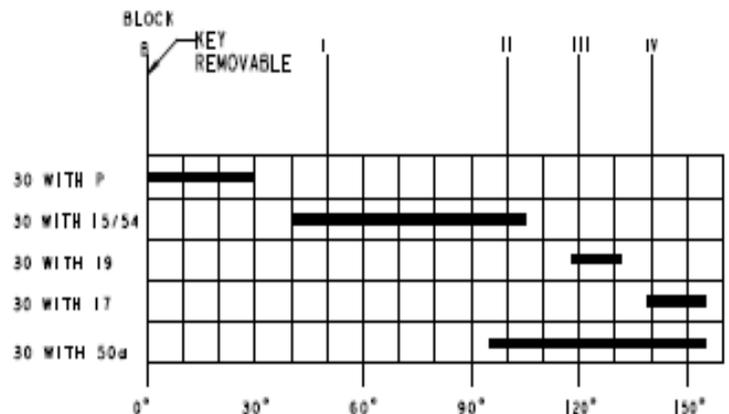

- OPERATING TEMPERATURE -30°C - $+80^{\circ}\text{C}$
- STORAGE TEMPERATURE -40°C - $+90^{\circ}\text{C}$
- TERMINALS DIN 46244 - A6,3x0,8
- 200 COMBINATIONS